










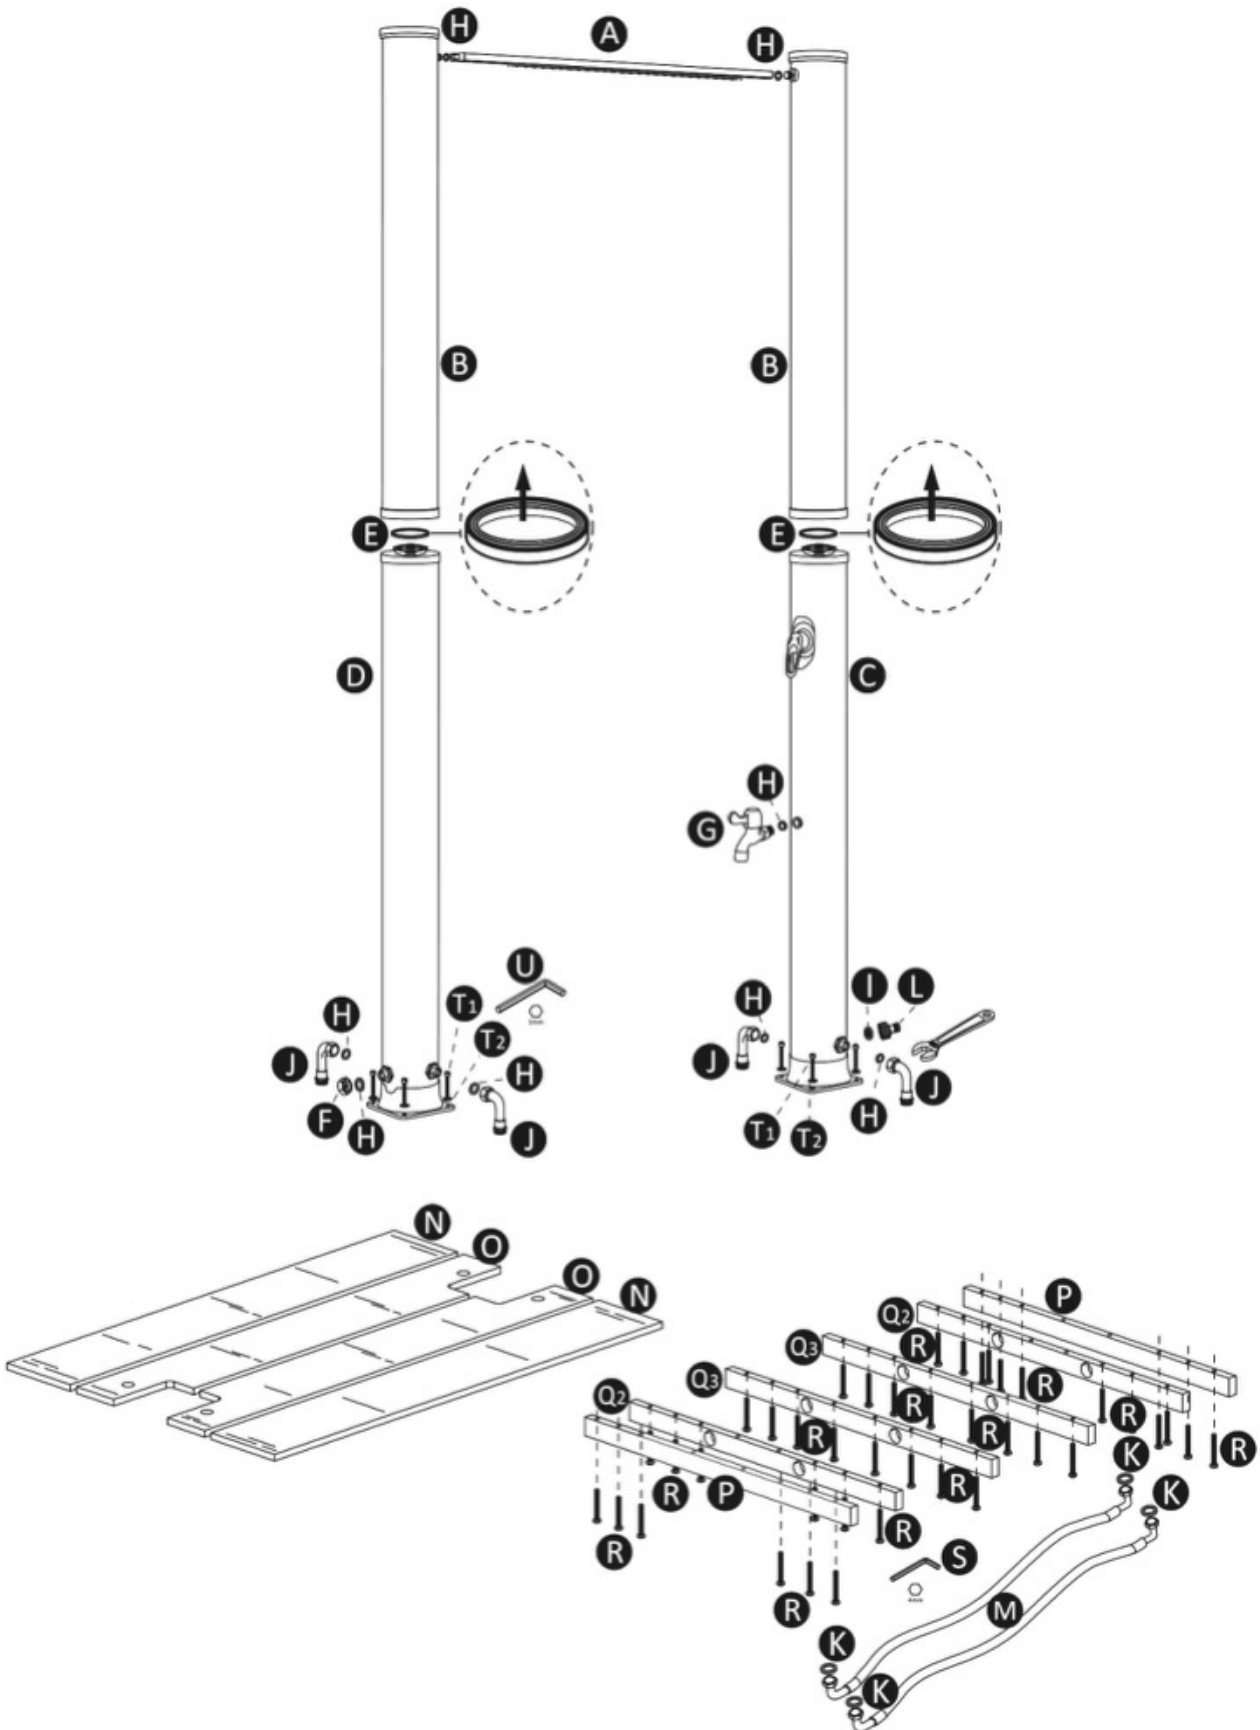
















EN Installation and User Manual

Important information: To prevent damage and improper use, please keep this installation and user manual readily accessible. Please read it carefully before installing or using the shower. Our information sheets and printed materials are provided for guidance based on our best knowledge. The content is provided without legal obligation. In all other respects, our General Terms and Conditions apply.

SOLAR SHOWER DUO RAIN 40 L



EN Installation and User Manual

<p>A</p>  <p>x 1</p>	<p>B</p>  <p>x 2</p>	<p>C</p>  <p>x 1</p>
<p>D</p>  <p>x 1</p>	<p>E</p>  <p>x 2</p>	<p>F</p>  <p>x 1</p>
<p>G</p>  <p>x 1</p>	<p>H</p>  <p>∅ 19 mm</p> <p>x 8</p>	<p>I</p>  <p>∅ 19 mm</p> <p>x 1</p>
<p>J</p>  <p>x 4</p>	<p>K</p>  <p>∅ 18.4 mm</p> <p>x 4</p>	<p>L</p>  <p>x 1</p>
<p>M</p>  <p>x 2</p>	<p>N</p>  <p>x 2</p>	<p>O</p>  <p>x 2</p>
<p>P</p>  <p>x 2</p>	<p>Q2</p>  <p>x 2</p>	<p>Q3</p>  <p>x 2</p>
<p>R</p>  <p>M6 x 48</p> <p>x 40</p>	<p>S</p>   <p>4mm</p> <p>x 1</p>	<p>T1</p>  <p>M6 x 35</p> <p>x 8</p>
<p>T2</p>  <p>∅ 22 mm</p> <p>x 8</p>	<p>U</p>   <p>5mm</p> <p>x 1</p>	

GENERAL INFORMATION

Read and keep the instruction

1. These operating instructions are a part of this solar shower gate. They contain important information about start-up and operation. Keep the operating instructions for further use.
2. Read the operating instructions and especially the safety instructions carefully before using the solar shower gate. Non-observance of this operating instructions manual may lead to severe injuries or damage to the solar shower gate.
3. The solar shower gate is not a toy. The manufacturer will not assume any liability for damage caused by inappropriate or incorrect use. Only use spare parts and accessories supplied or recommended by the manufacturer.
4. When initial use the shower in order to get rid of plastic and oil smell, please let water run out for several minutes and clean the shower inner parts with flowing water.

ASSEMBLY INSTRUCTION

1. Choose a location which will receive as much as possible sunlight for the solar shower gate.
2. Place the shower base in the order of (N-O-O-N) and connect them, then use screws (R) to install the fixed rods in the following order (P-Q2-Q3-Q3-Q2-P) to the back of the shower base (N-O-O-N). We recommend using a $\varnothing 4$ mm Allen wrench (S) or electric drill.
3. Pass the two water hoses (M) through the four fixed rods (Q2-Q3-Q3-Q2) with holes in sequence. Making sure that the two hoses (M) are parallel and do not cross each other, thread them through the holes in shower bases (O) respectively and connect the connect pipes (J) with gaskets (K), tighten the nuts on the hoses (M) with an open-ended wrench, and turn the shower base so that the front side of the shower base is facing up when you are finished.
4. Mount the water tanks (C&D) to shower base with screws (T1) and washers (T2), a $\varnothing 5$ mm Allen wrench (U) is required. Attach the connect pipes (J) with gaskets (H) and tighten the nuts on the connect pipes (J) with an open-ended wrench.
5. Place the O-ring (E) on the lower stand (C&D), then lift the upper stand (B) onto the lower stand (C&D) and lock them firmly.
6. Attach the footwash (G) with gasket (H) and the adapter (L) with gasket (I) to the tank (C). Then attach the drain cap (F) with gaskets (H) to the tank (D).
7. Attach the shower head (A) with gaskets (H) to the upper stand (B), with an open-ended wrench.

USING THE SOLAR SHOWER

1. Open the handle and turn it to position „hot“. This ensures that no air pockets are trapped in the hoses while filling with water.
2. Connect a garden hose to the hose adapter (L) and the faucet of the water pipe. Turn on the water to fill the tanks. It will take some minutes to fill up the tanks. Place the garden hose in a position where it won't trip anyone.
3. When the water flows out of the top shower (A), turn the handle off. Now the tanks begin to heat the water.
4. Depending on available sunlight and outside temperature, the tanks will take about two hours to fully heat the water.
5. Water temperature in the tanks can reach up to 60 degrees during strong sunshine.
6. Open the shower handle. Turn the handle left or right to set your desired water temperature. Use the handle to control the water temperature and quantity, and enjoy showering in warm water.
7. After showering, close the shower handle. Turn off the faucet of the water pipe. The shower is finished.

WARNING: Sometimes a little water runs out of the top shower, even if the shower handle is closed. This is due to the heating of warm water in the tank and is not a defect.

WINTERIZATION

1. Turn off and disconnect the garden hose.
2. Open the shower handle and turn it to position „hot" and unscrew the drain cap(F) to drain the water from the tank.Do not turn off or turn the shower handle while draining,otherwise the water will stop draining out.
3. Disassemble the gate frame from the two tanks(C&D) ,then remove the two tanks from the shower base. Empty the remaining water from the tanks and screw the drain cap(F) with gaskets(H) to the tank(D).
4. Remove the screws(R) and hoses (M) from the shower base.
5. Only clean the product with a standard bathroom cleaner,clear tap water and a lint-free cloth.Aggressive cleaning agents can damage the product.Dry the product with a lint-free cloth.
6. After thorough cleaning and drying,store the product in a dry and frost-free place(=+5°C).

WARNING!

1. RISK OF SUFFOCATION!

- Getting your head caught in packaging film or swallowing other packaging material can lead to death by suffocation.Make sure that children and mentally impaired people do not play with the packaging material.

2. RISK OF DAMAGE!

- Don't open the packaging with sharp or pointed objects,such as cutters.

3. FORESEEABLE MISUSE!

- Never use the product as a climbing frame or as a post for suspending washing lines or hammocks.
- Recommended water pressure:maximum3,5 bars.Without any circumstances should the product be operated by an additional pump or domestic water supply.
- Don't use salt or other anti freezing methods.

4. RISK OF SCALDING!

- To avoid scald,pay attention to turn the handle to „cold"water position before using the solar shower.Then adjust the desired temperature.
- Never leave children and persons with reduced physical,sensory or mental abilities(e.g.persons under the influence of alcohol)unattended in the vicinity of the product.

5. RISK OF INFECTION!

- Bacteria can multiply in the tank if the product is not used for longer periods.Drain the product before and after longer periods of non-use.Don't drink the water from the product.